







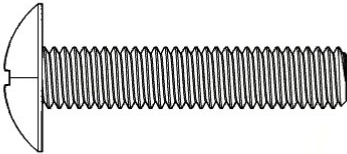



QCRND17PBK



Item Name	Qty	Image
M4x10mm Screw	4	
M5 Nylon Lock Nut	4	
M5x16mm Screw	4	
Double Hole T-Slot Nut	2	
Single Hole T-Slot Nut	2	
M4 Washer	4	
M4x12mm Screw	2	
M6x30mm Screw	2	
M6 Serrated Lock Washer	2	

QCRND17PBK

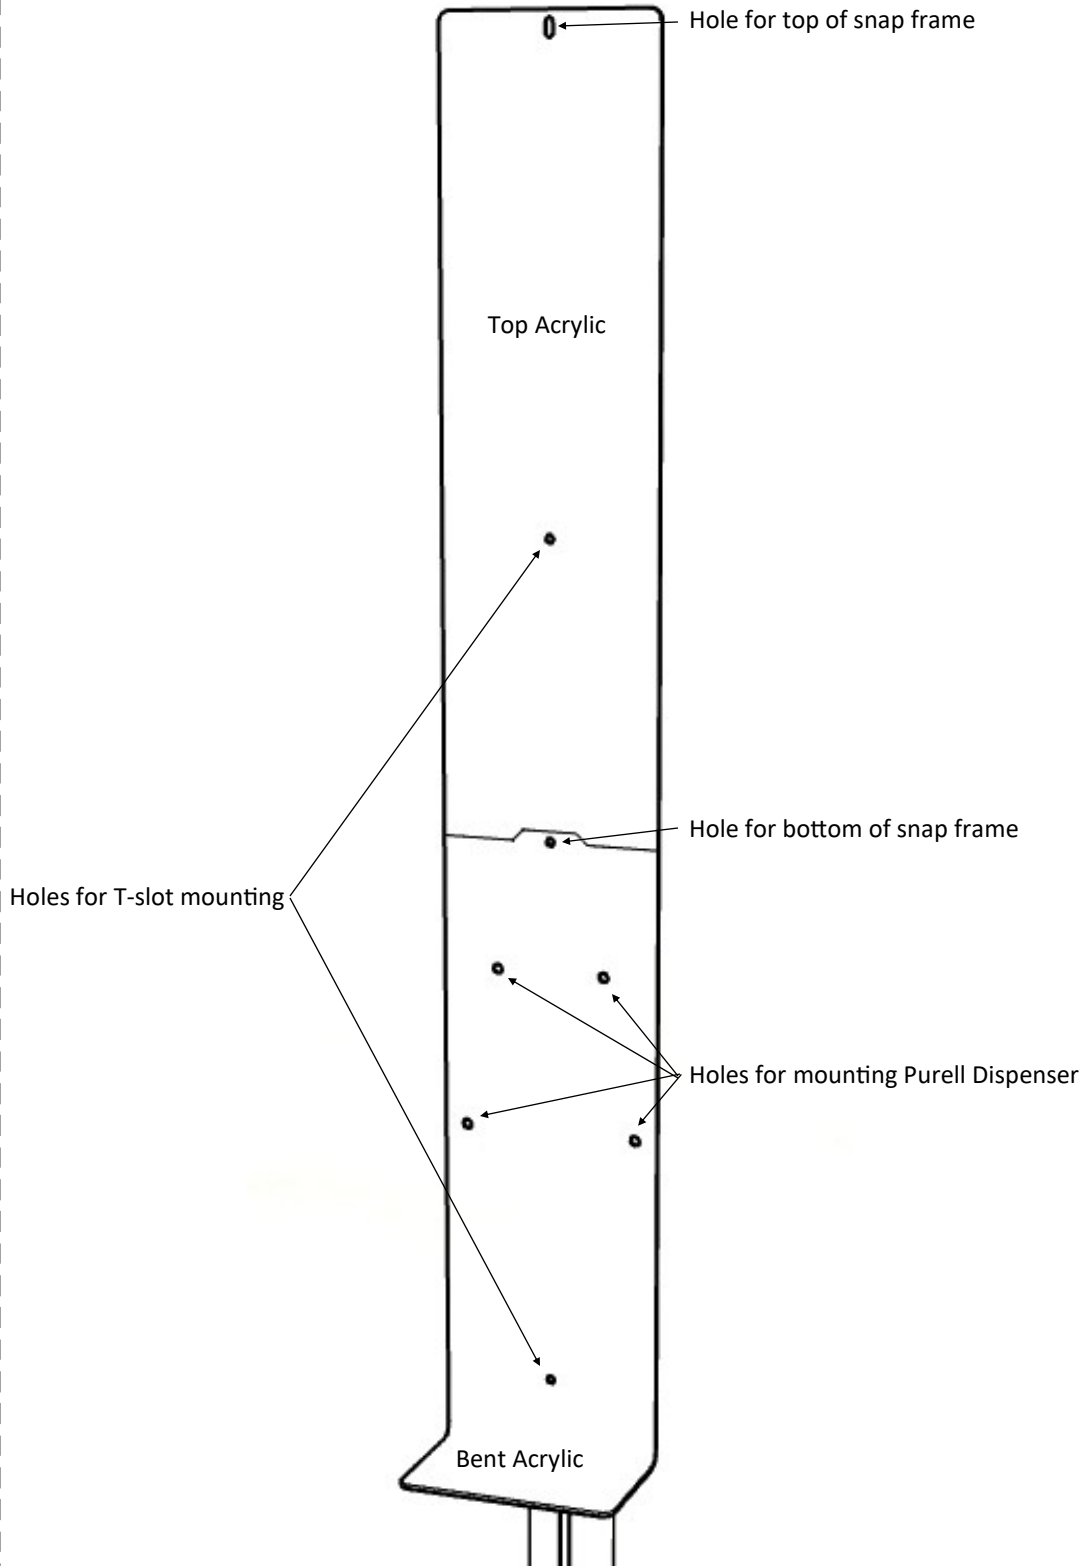


QCRND17PBK

Attach bent acrylic panel using 1x M4x10mm screw, M4 washer, and double hole T-slot nut as shown.

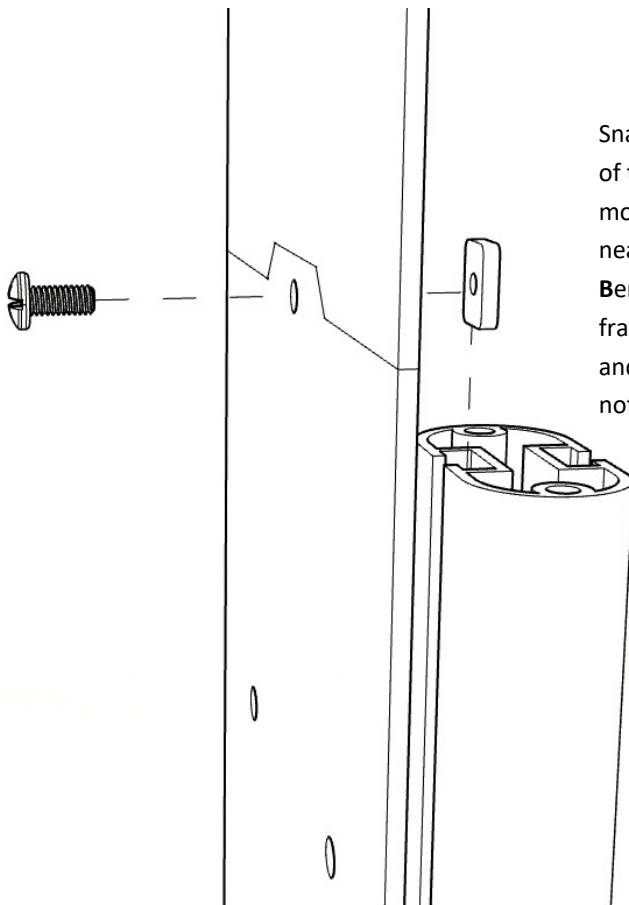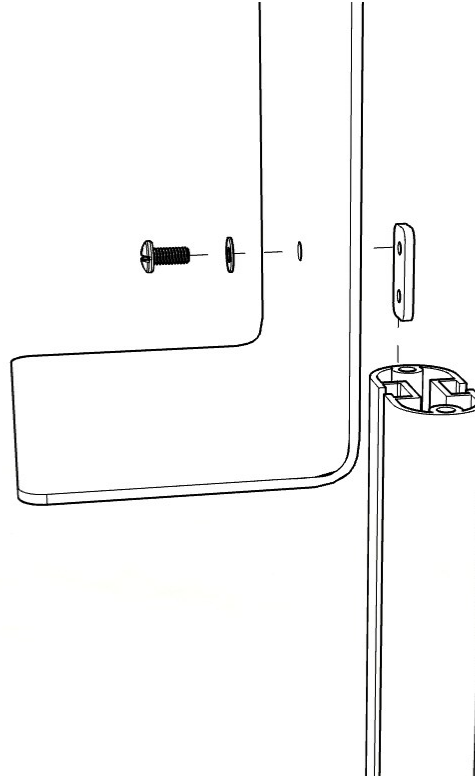


Snap open the top and bottom rails of the snap frame to expose the mounting holes. Using the hole nearest the tab at the top of the **Bent Acrylic** piece, mount the snap frame using 1x M4x12mm screw and single hole T-slot nut. (Frame not shown)

QCRND17PBK

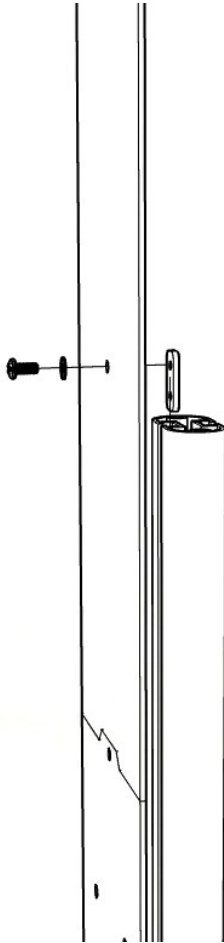

Pivot the frame out of the way and install second double hole T-slot nut in the lower hole. Slide the assembly further down the T-slot and tighten all the screws as needed. Attach the top of the snap frame using the top slot on the top acrylic piece and the remaining single hole T-slot nut.

Attach the Purell Dispenser to the Bent Acrylic, using the adhesive backing attached to the Purell Dispenser. Align the 4 holes in the Bent Acrylic with the corresponding 4 holes visible on the inside of the Purell Dispenser. Use the M5x16mm Screws and M5 Nylon Lock nuts with the 4 aligned holes to further secure the Purell Dispenser.

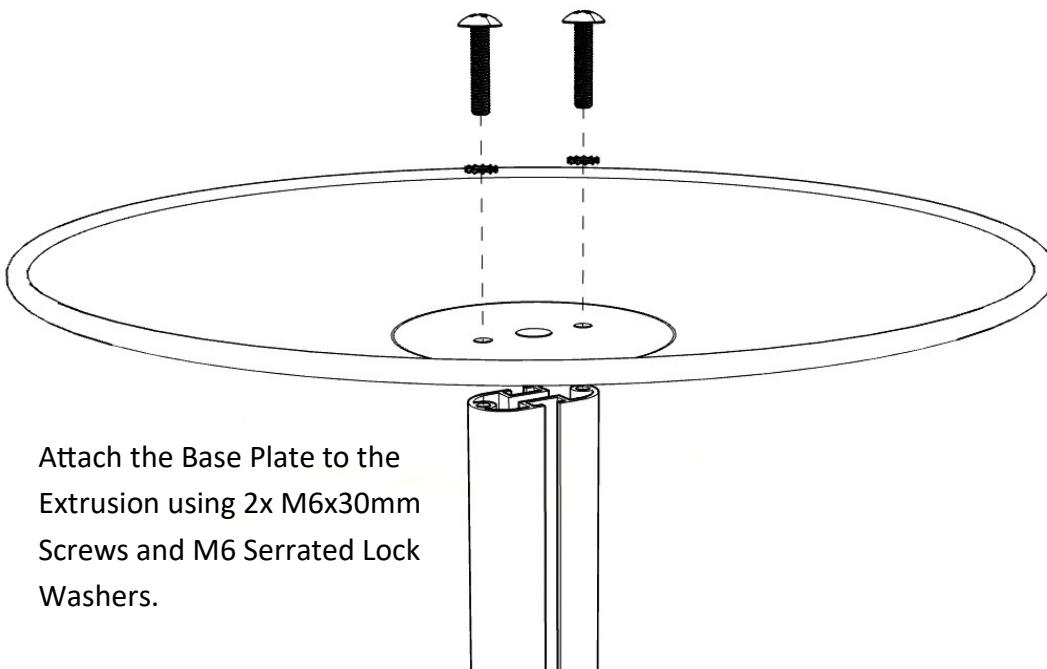

Attach the Base Plate to the Extrusion using 2x M6x30mm Screws and M6 Serrated Lock Washers.