




# SPRINGER® SIDEWALK SIGN


## ASSEMBLY INSTRUCTIONS

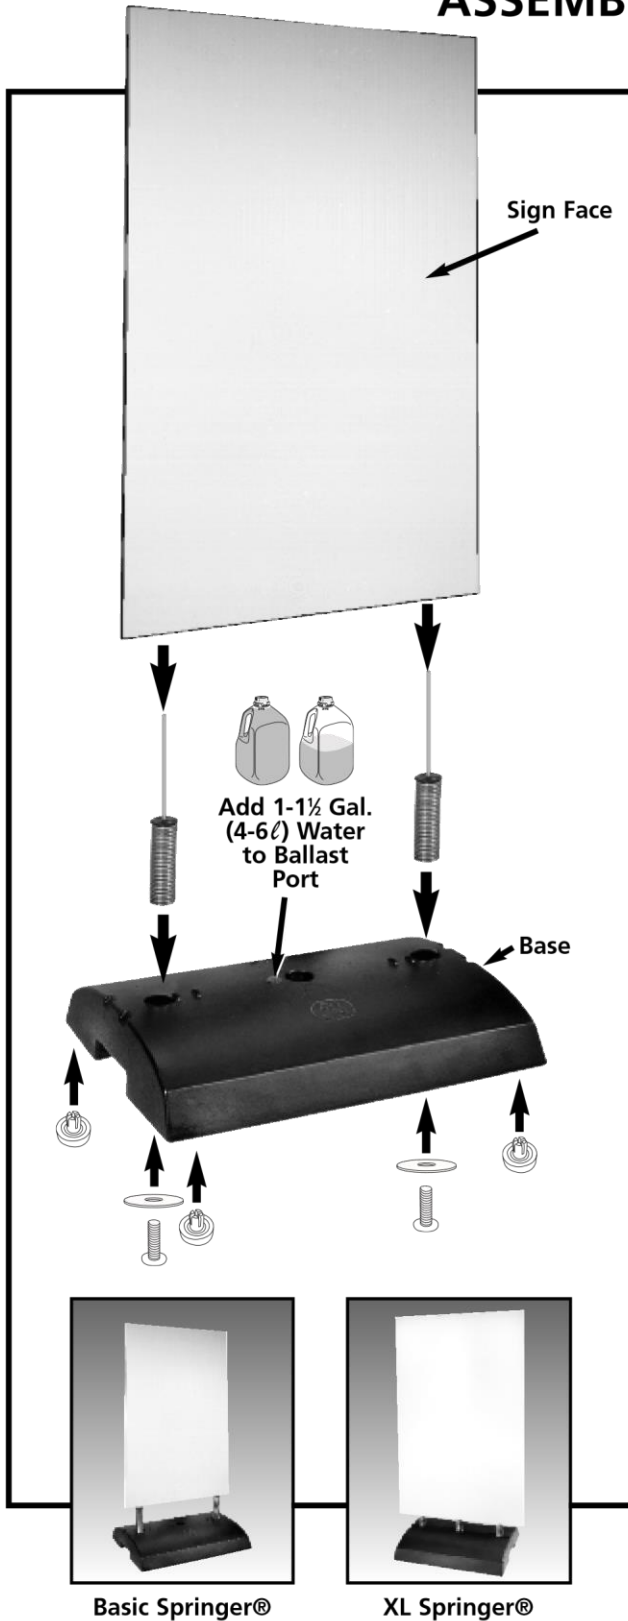

Foot (4)



(2 for Basic Swinger.  
3 for XL Swinger)



Truss Head Bolt  
(2 for Basic Swinger.  
3 for XL Swinger)



Springs (3)

1. Install no-mar anti-slip feet by pushing **Feet** into holes on bottom of **Base** and pressing drive pin in completely to lock foot into hole.
2. Attach **Spring Assembly** to **Base** using **Truss Head Bolt** and **Washer**. Insert **Truss Head Bolt** with **Washer** through outer recessed holes in bottom of **Base** and tighten into **Spring Assembly**. You may have to apply
3. Add 1-1½ gallons (4-6 litres) of water into **Ballast Port** on top of **Base** and then insert **Ballast Port Cap**. The sign
4. Attach decorated/lettered **Sign Face** to **Base** by inserting rods from **Spring Assembly** into flutes of the **Sign Face**. Make sure **Sign Face** is centered and resting on top of
5. To add more tension between **Sign Face** and **Spring Assembly** move Rod from **Spring Assembly** 1-2 flutes on

### HELPFUL HINTS

- Decorate/letter **Sign Face** before attaching to **Base**. Keep design simple for maximum impact.
- To transport, tip sign on side using handhold and carry
- For added stability add more water through the **Ballast Port**.

### CAUTION

**Springer® Signs** are designed for winds up to 30 mph. In the event of higher winds bring sign inside.

DO NOT display or store sign without **Sign Face** attached to **Spring Assemblies**.

Remove **Spring Assemblies** when storing sign without **Sign Face** attached.

For safety and security bring sign in when business is closed.